



Single stage belt driven compressors

A39B PRO range

Reliable power and performance in combination with user friendly features.


Performance

Belt guard improves airflow over pump

Reliable

Reduced wear thanks to great cooling

Applications

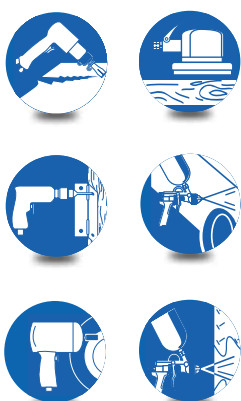

PRO A39B 200 FM3
3 hp, 200 litres

Model	Part No	L	L/min	CFM	HP	KW	RPM	Voltage	Bar	dB(A)	L x W x H (mm)	kg	GBP
PRO A39B 90 CM3	4116025017	90	393	13.8	3	2,2	1050	230/50/1	10	93	1180 x 460 x 930	72	847
PRO A39B 90 FT3	4116024530	90	393	13.8	3	2,2	1050	400/3/50	10	93	1180 x 460 x 930	72	839
PRO A39B 150 FM3	4116025015	150	393	13.8	3	2,2	1050	230/50/1	10	93	1375 x 420 x 950	87	909
PRO A39B 150 FT3	4116024539	150	393	13.8	3	2,2	1050	400/3/50	10	93	1375 x 420 x 950	87	859
PRO A39B 200 FM3	4116025016	200	393	13.8	3	2,2	1050	230/50/1	10	93	1500 x 470 x 1110	91	1,009
PRO A39B 200 CM3	4116025022	200	393	13.8	3	2,2	1050	230/1/50	10	93	1500x470x1110	91	1,045

* Single phase run off a 16 Amp supply



PRO A39B 150 FM3
3 hp, 150 litres



Slow speed, low temperature,
low noise



Unique innovative belt guard
design to improve cooling



PRO A39 270 FM3 TANDEM
3hp, 270 litres



Reliable and easy to use

Model	Part No	L	L/min	CFM	HP	KW	RPM	Voltage	Bar	dB(A)	L x W x H (mm)	kg	GBP
PRO A39B 200 FT3	4116024541	200	393	13.8	3	2,2	1050	400/3/50	10	93	1500x470x1110	91	953
PRO A39B 270 FT3	4116024543	270	393	13.8	3	2,2	1050	400/3/50	10	93	1530x595x1160	138	1,086
PRO A39B 270 FM3 TANDEM	4116024868	270	786	27.6	3+3	2,2+2,2	1050	230/50/1	10	93	1570x470x1030	153	2,718

* Tandem single phase unit requires a 32amp single phase supply